



Perfectly

Clear



Jandy sets the benchmark for cartridge filters

You will appreciate the technologically advanced, user-friendly features of the CL filter every time you jump into your pool.

HELPFUL TANK HANDLES

Designed to make filter installation and cleaning easy.



Clean/Dirty indicator gauge that can be customized for each pool makes it easy to assess filter condition.



Corrosion-resistant, heavy duty injection molded tank with integrated base for strength. Latest high-tech polymeric materials for long-lasting performance.

SAFETY FEATURES

Heavy duty band clamp for safety. Continuous automatic internal air relief system for peace of mind.

STANDARD PLUMBING


Standard unions and inlet/outlet plumbing for quick and easy hookups.



Easy Grip Handles



Gauge Can Be Customized




CL Series Filter At Work




Jandy CL Filters - Ultra Filtration


The combination Pressure Gauge/Air Release Valve can be positioned 360° for easy viewing and the Clean/Dirty indicator can be customized for each pool to make it easy to assess filter condition.

CL Filter

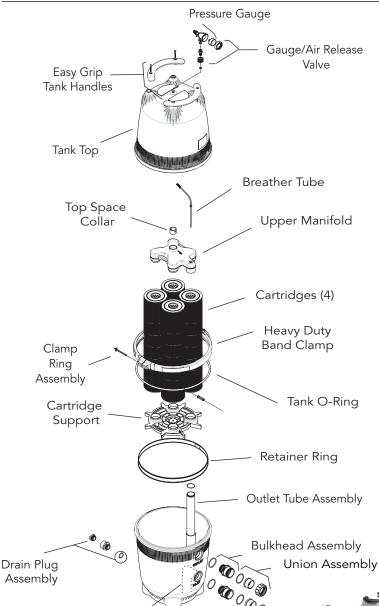







CL Series Specifications			
Model Number	CL340	CL460	CL580
Filter Area	340 sq. ft.	460 sq. ft.	580 sq. ft.
Design Flow Rate	1 gpm/ft. ²	1 gpm/ft. ²	1 gpm/ft. ²
Maximum Flow	135 gpm	180 gpm	225 gpm
Six Hour Capacity	48,600 gals.	64,800 gals.	81,000 gals.
Maximum Working Pressure	50 psi	50 psi	50 psi
Cartridges Required	4 (85 ft. ² each)	4 (115 ft. ² each)	4 (145 ft. ² each)
Shipping Weight	93 lbs.	95 lbs.	101 lbs.
Height (A Dim)	41 inches	41 inches	47 inches
Footprint	25 inch circle	25 inch circle	25 inch circle
Distance Between Inlet and Outlet	8 inches	8 inches	8 inches

ALL JANDY PRODUCTS WORK SEAMLESSLY TOGETHER

SEAMLESSLY TOGETHER

The Jandy AquaLink® RS

Control System manages our complete line of technologically advanced products.







Tank Bottom

Pumps • Filters • Heaters • Air Energy Heat Pumps Controls • Lights • Water Purification Systems • Valves